Notice No.2

Rules and Regulations for the Classification of Special Service Craft July 2019

The status of this Rule set is amended as shown and is now to be read in conjunction with this and prior Notices. Any corrigenda included in the Notice are effective immediately.

Please note that corrigenda amends to paragraphs, Tables and Figures are not shown in their entirety.

Issue date: November 2019

Amendments to	Effective date	IACS/IMO implementation (if applicable)
Part 3, Chapter 1, Section 6	1 January 2020	N/A
Part 3, Chapter 5, Section 5	1 January 2020	N/A

Lloyd's Register

Part 3, Chapter 1
General

■ *Section 6*
Definitions

6.10 Position 1 and Position 2

6.10.1 For the purpose of Load Line Conditions of Assignment, there are two basic positions of hatchways, doorways and ventilators defined as follows *(see also Figure 1.6.1 Position 1 and Position 2)*:

~~Position 1 - Upon exposed freeboard and raised quarterdecks, and exposed superstructure decks within the forward 0,25 of the load line length, L_L.~~

~~Position 2 - Upon exposed superstructure decks abaft the forward 0,25 of the load line length, L_L, and located at least one standard height of superstructure above the freeboard deck.~~

~~Upon exposed superstructure decks situated within the forward 0,25 of the Load Line length, L_L, and located at least two standard heights of superstructure above the freeboard deck.~~

Position 1:

- Exposed decks located abaft the forward 0,25 of the load line length, L_L, and less than one standard superstructure height above the freeboard deck.
- Exposed decks situated within the forward 0,25 of the load line length, L_L, and located less than two standard heights of superstructure above the freeboard deck.

Position 2:

- Exposed decks situated abaft the forward 0,25 of the load line length, L_L, and located at least one standard height of superstructure, but less than two standard heights of superstructure, above the freeboard deck.
- Exposed decks situated within the forward 0,25 of the load line length, L_L, and located at least two standard heights of superstructure, but less than three standard heights of superstructure, above the freeboard deck.

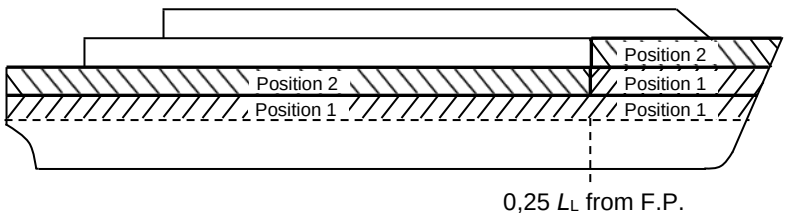

Figure 1.6.1 Position 1 and Position 2

Existing Figure 1.6.1 has been renumbered 1.6.2.

Part 3, Chapter 5
Anchoring and Mooring Equipment

■ *Section 5*
Anchors

5.1 General

~~5.1.5 In addition, the craft is to be supplied with one spare anchor located at each of the ports on its regular scheduled service, or alternatively the spare anchor may be carried on board.~~

Existing paragraphs 5.1.6 to 5.1.9 have been renumbered 5.1.5 to 5.1.8.

© Lloyd's Register Group Limited 2019
Published by Lloyd's Register Group Limited
Registered office (Reg. no. 08126909)
71 Fenchurch Street, London, EC3M 4BS
United Kingdom

Lloyd's Register and variants of it are trading names of Lloyd's Register Group Limited, its subsidiaries and affiliates. For further details please see http://www.lr.org/entities

Lloyd's Register Group Limited, its subsidiaries and affiliates and their respective officers, employees or agents are, individually and collectively, referred to in this clause as 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.